

ADAPTER DATASHEET

Adapter Cable

Model No:

BWMCXJ-MMCXWJ-RG178L500

Description:

MCX straight male to MMCX right angle male adapter cable

Features:

0-6000MHz

Structure:

Cable: RG178 x 50cm

Connector: MCX straight male to MMCX right angle male

RoHS & REACH Compliant





CONTENTS

1. Description	3
2. Specifications	4
3. Coaxial Cable Specifications	5
4. Dimensions	6
4.1 Actual Picture	6
4.2 Parts Drawing	6
5. Test Equipment	7-8



BWMCXJ-MMCXWJ-RG178L500

Part Number Description

BW	Company	BAT WIRELESS
MCXJ	Connector	MCX straight male
-	Constant	Constant
MMCXWJ	Connector	MMCX right angle male
-	Constant	Constant
RG178	Cable	RG178
L	Long	Length
500	Cable Length	500mm

Selection Table

Connector	SMA	N	TNC	BNC	SMB	MCX	Customizable
Cable Type	RG174	RG178	RG316	RG58			Customizable
Cable Length	100mm	200mm	300mm	500mm	1000mm	1500mm	Customizable

1. Description

Bat Wireless BWMCXJ-MMCXWJ-RG178L500 is a high-performance RF coaxial adapter cable, typically operating in the 0-6 GHz frequency range. Designed specifically for wireless communication devices, it connects various interfaces and ensures stable, low-loss signal transmission. It is suitable for use in applications such as Wi-Fi modules, 4G/5G devices, GPS antennas, drones, and IoT terminals, resolving compatibility issues between different interfaces. It connects to both MCX and MMCX interfaces or device ports. High-purity coaxial cable minimizes signal attenuation, and optimized processing and coaxial structure ensure low insertion loss.

Classic application scenarios:

Wireless communication modules: GPS/Beidou positioning terminals, 4G/5G modules, Wi-Fi/Bluetooth modules

Test and measurement equipment: RF test probe connection ports, spectrum analyzers, signal generator antenna ports

IoT terminals: Signal enhancement for smart homes, drones, and wearable devices


Bat Wireless provides customized services to optimize your device, we have a mature R&D team that can respond quickly to meet your needs. If you have any requirements, please contact our sales and FAE.



2. Specifications

Parameters	Typ.	Units	Notes
Electrical Characteristics			
Product Type	Adapter Cable		
Frequency Range	0-6000	MHz	
Input Impedance	50	Ω	
Contact resistance	IC < 5, OC < 2.5	MΩ	
Insulation resistance	>1000	MΩ	
InsertLoss	0.15	dB(6GHz)	
RF leakage	500	V	
Durability	500	Times	
ID of Plug / OD of Jack	-	mm	
DCVoltage	-	V	
Mechanical Characteristics			
Connector Type	MCX straight Male		
Connector Type	MMCX right angle male		
Cable Type	RG178		
Cable Length	50	mm	
Mount way	press-fit type		
Color	-		
Material	Copper		
Weight	-	g	
Environmental Characteristics			
Waterproof Rating	-		
ROHS Complaint	Yes		
Operating Temperature	-45~ +85	°C	
Storage Temperature	-45~ +85	°C	

3. Specification

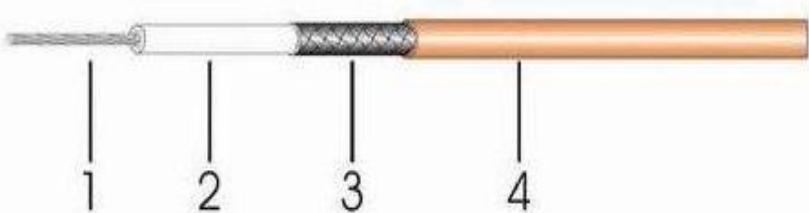Parameters	Parameters	Typ.	Units	Notes
Electrical Characteristics				
Inner Conductor	Material	Tinned Copper Wire		
	Construction	1/0.8±0.05	mm	
	Nom.Dia	0.306±0.02	mm	
Insulation	Material	FEP		
	Average Thickness	-	mm	
	Nom.Dia	0.88±0.05	mm	
Outer Conductor	Material	Tinned Copper Wire 16*3/0.10		
	Nom.Dia	1.30±0.05	mm	
	CoverageRatio	90±5	%	
Jacket	Material	FEP		
	Nom.Dia	1.80±0.05	mm	
Mechanical Characteristics				
Impedanc	-	50±2	Pf/m	
Capacitance	-	96	Ω	
20°C Max Attenuation	0.1GHz	0.70	dB/m	
	0.4GHz	1.50	dB/m	
	1GHz	1.90	dB/m	
	2GHz	2.80	dB/m	
	3GHz	3.70	dB/m	
	-	-	dB/m	
Structure Drawing				
				



4 . Demensions

4.1 Actual Picture



(* Note: The picture is for reference only. Due to the sensitive nature of the antenna, please notify us of any changes to the surrounding structure for evaluation.)

4.1 Parts Drawing

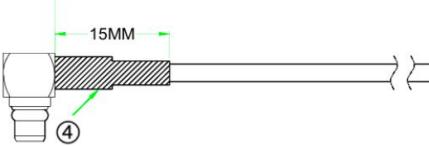PARTS DRAWING		ROHS Compliant	REV	PRODUCT NO.	DATE	NAME	DESCRIPTION		
 ②		 ①RG178		 ③		 ④			
Requirements: 1. The wire jacket shall be free from cuts or damage. 2. 100% continuity testing shall be performed, and all products must pass. 3. 100% full inspection is required, and all products must meet specifications. 4. Eco-friendly manufacturing processes shall be adopted, and finished products must comply with ROHS requirements. 5. Unless otherwise specified, general tolerances shall apply.									
NO	Code	Name	Description	O'ty	PRODUCT NAME Connector-MCX Male-MMCX Male-RG178-L=500MM UNIT MM SIZE 1:3 PAGE 1 OF 1 FORNMT A4				
					GENERAL TOLERANCE 100-200 : ± 3.00 50-100 : ± 2.00 25-50 : ± 0.20 10-25 : ± 0.15 1-10 : ± 0.10				
4	Heat Shrink Tubing	3.5*15MM Black		2					
3		MCX	Straight Male	1					
2		MMCX	Bent Male	1					
1		Wire	RG178 L=500MM	1					
Operating Temperature: -45°C ~ 85°C Storage Temperature: -45°C ~ 85°C									

5 . Test Equipment




Keysight/E5071C Network Analyzer



R&S/CMW500 Comprehensive tester




R&S/SMBV100B Signal Source

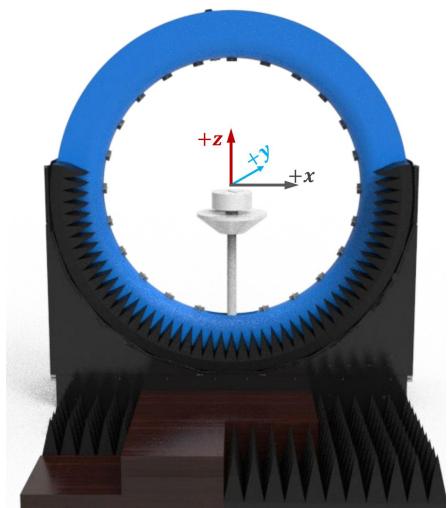

DT-3500 Datasheet / System Specifications

Specification:	Description
Test Frequency :	400MHz-8.5GHz
System Size :	$L \times W \times H = 4 \times 3.5 \times 3.5\text{m}$
Number of Probes :	23 (Probe) + 1 (link)
Interval Angle :	15°
Sampling Diameter :	2200mm
Carring Capacity :	$\leq 40\text{kg}$



Testing Capability	Description
Active measurement	<p>Capability : TRP、TIS、EIRP、EIS,. etc</p> <p>Mode : 2G/3G/4G/5G、Wi-Fi b/g/n/a/ac/ax、BT、NB-IOT、Cat-M (eMTC)、GPS/BEIDOU/GLONASS、ZigBee、LoRa(Non-Signaling),.etc</p>
Pasive measurement	<p>Test category : Gain、Efficiency、2D pattern、3D pattern、Pattern roundness、Axial Ratio, ECC, Phase center,. etc</p> <p>Polarization : Circular polarization, linear polarization, elliptical polarization</p>

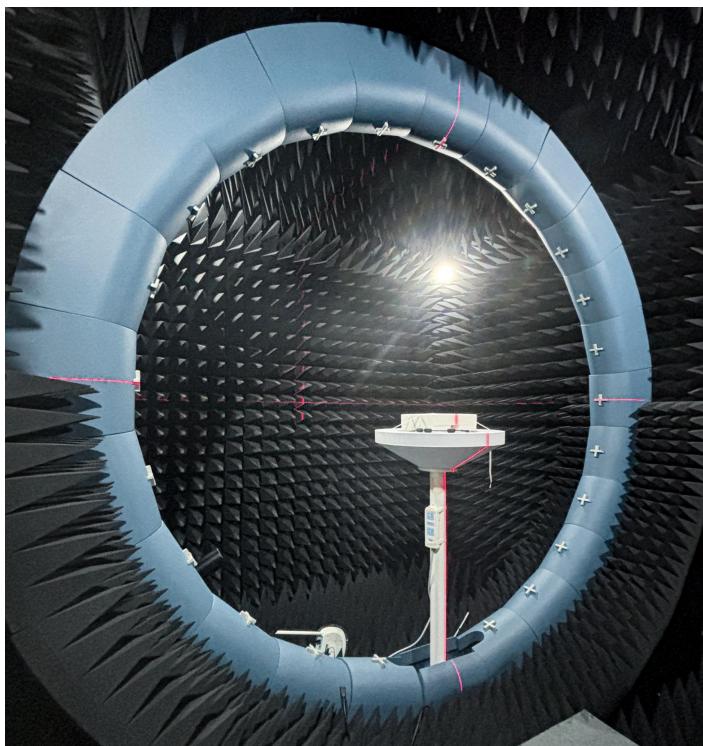

RF Link diagram of multi probe spherical near-field testing system



RF Link Overview

RF Link of Passivemeasurement

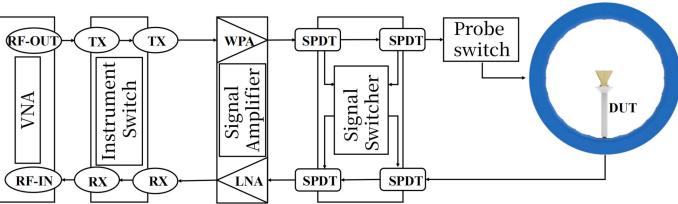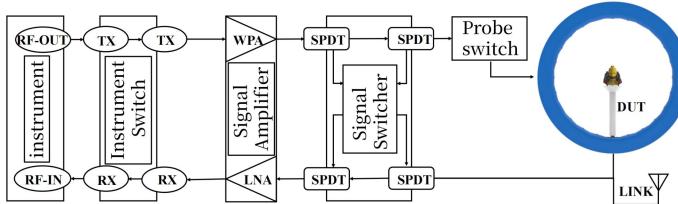

RF Link Overview

RF Link of Passivemeasurement

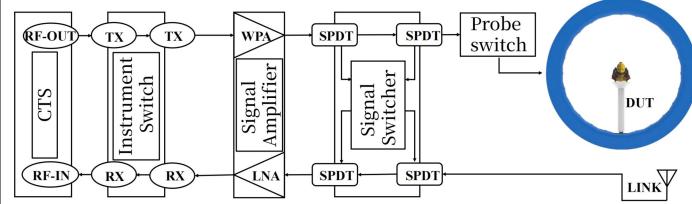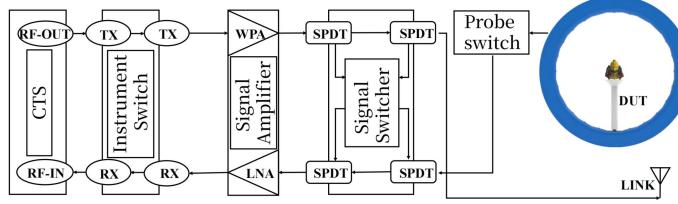



DECLARATION:

Legal Notice: In order to provide users with better service, Shenzhen Bat Wireless Technology Co., Ltd. (hereinafter referred to as 'Bat Wireless') will endeavour to present users with detailed and accurate product information in this manual. However, due to the time-sensitive nature of the content in this manual, Bat Wireless cannot guarantee the timeliness and applicability of this document at all times. Bat Wireless reserves the right to update the content of this manual without prior notice. To obtain the latest information, we kindly request users to regularly visit the Bat Wireless official website or contact Bat Wireless staff. Thank you for your understanding and support!

Copyright Notice: All content in this product manual (including text, charts, logos, and designs) is protected by copyright law and international copyright treaties. No entity or individual may reproduce, modify, distribute, or use any part or all of this manual in any form (including electronic, mechanical, photocopying, etc.) without prior written authorisation from our company. Infringers will be held legally liable. All rights reserved.

Trademark Notice: All product names and corporate logos of Bat Wireless mentioned in this manual are the lawful property of our company (including affiliated companies). Unauthorised use, reproduction, or imitation is strictly prohibited. Third-party trademarks referenced in this manual are the property of their respective owners, and their use is solely for illustrative purposes and does not imply any commercial affiliation or authorisation. Our company reserves all rights to pursue legal action against any infringement.

Disclaimer: The product information contained in this manual is for reference only. Actual product performance may vary depending on the usage environment and configuration differences. Our company makes no express or implied warranties regarding the accuracy, completeness, or applicability of the content of this manual and shall not be liable for any direct or indirect losses arising from the use or inability to use the content of this manual. Users should assess the applicability of the product and follow actual operating procedures. The final interpretation of this manual is reserved by our company.

Shenzhen Bat Wireless Technology Co.,Ltd

Office Add: Room 1301, 13th Floor, No. 8 Langhua Road, Xinshi Community, Dalang Street, Longhua District, Shenzhen

Email: marketing@batwireless.com

Tel: 0755-21031236



Documentation

Version:	Aug-21-2025-A01
Date:	2025-08-21
Note:	First released
Author:	Lisa / Cathy

Change Log
