


This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	25/08/17	25/08/17

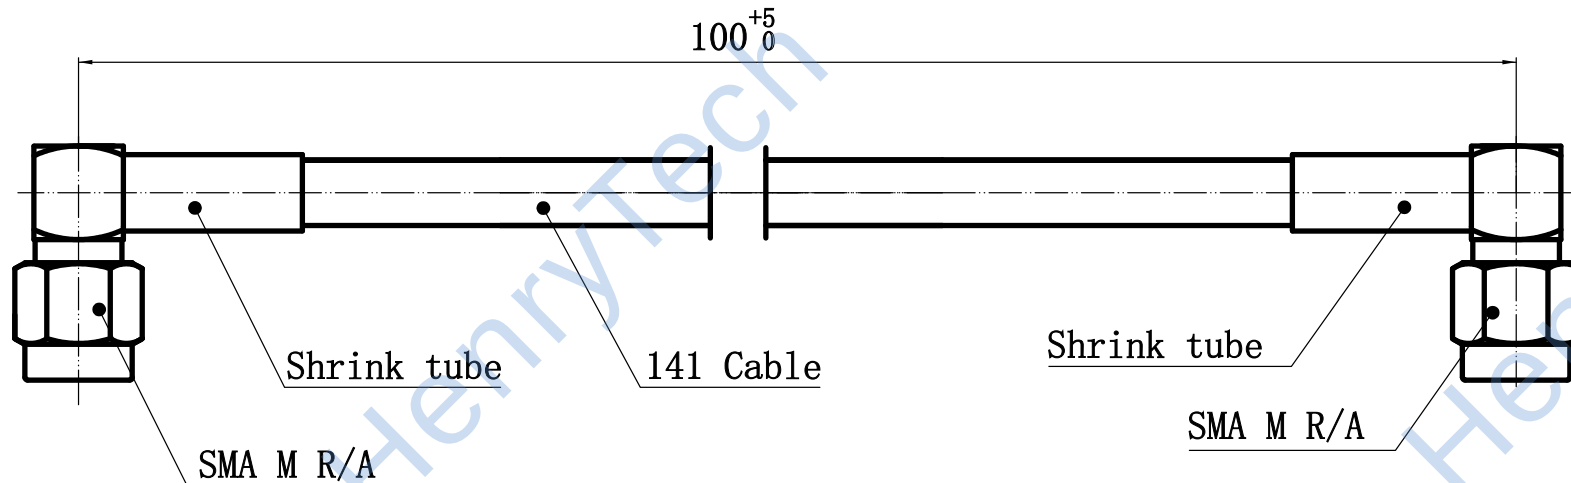

1Electrical

1.1 Impedence	50 Ω
1.2 Frequency	DC-6GHz
1.3 Dielectric withstanding voltage	1000V(rms)
1.4 Center contact resistance	3M Ω
1.5 Outer contact resistance	2M Ω
1.6 Insulation Resistance:	5000M Ω min
1.7 VSWR	≤ 1.25

Tel:Lee +86-028-85589664
Web:www.henglitaitech.com/cn

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DESIGN : H.wei 25/08/17	TITLE: Cable assembly				
ENGINEER: L. yu 25/08/17	SMA male R/A to SMA male R/A for .141/RG402 Cable Length 100mm	 DIMENSION IN MILLIMETERS (mm)			
APPROVED : W.yi 25/08/17					
TOLERANCES UNLESS OTHERWISE SPECIFIED	PART NO. HL-SMAMW-141-SMAMW-100MM	SIZE: A4	MATERIAL: N/A	QUANTITY: 1/1	REV: A
X ± 0.50					
.X ± 0.20					
.XX ± 0.10					
ANGLES $\pm 1^\circ$					